

# MULTIPLE APPLICATIONS


## WITH A COMPACT PUMP

The Econ FX and Econ VX are ideal for light duty applications in swimming pools, food & beverage, metal finishing, irrigation & horticulture and more.

- Wall mountable
- cULus for indoor/outdoor use
- CE listed



Fixed Speed

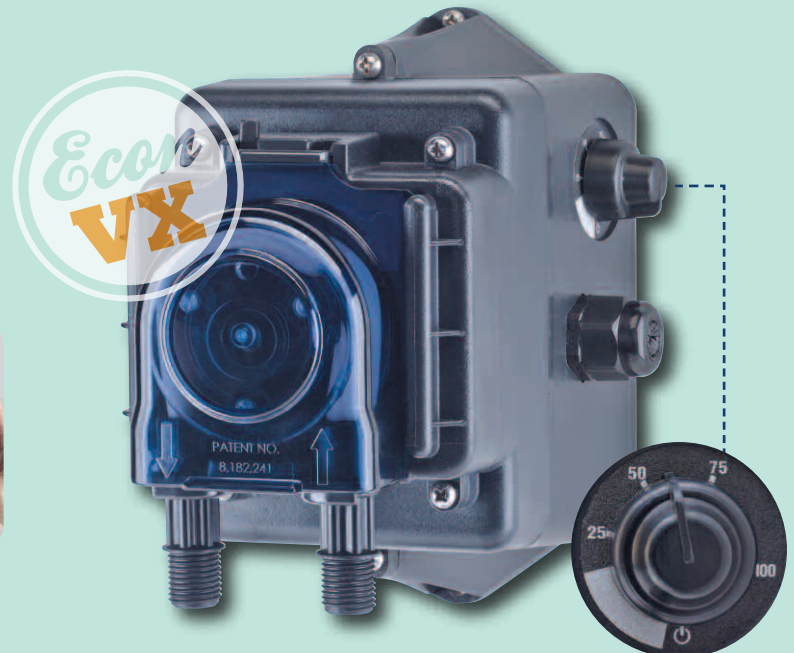

Variable Speed

### Effortless Tube Replacement



The patented quick release pump head design offers effortless tube replacement plus a solid one piece tube construction.

- Self-priming to 25 feet (7.6 m)
- Can run dry
- Output reproducibility  $\pm$  5%
- FX: 3 lbs (1.3 kg)  
VX: 4 lbs (1.5 kg)
- 5.2 x 4.4 x 5.9 in. (13.2 x 9.1 x 14.9 cm)

### Mounting Kit EC303


Attach pump to a Stenner tank or wall



### Stand EC304

Mount pump to a wall or display on a flat surface

Vertical mount required for wet environments.



Optional mounting accessories sold separately

### Econ FX Flow Rate Output Charts

Item Number Prefix	Pump Tube	Roller Assembly	Gallons per Day	Pressure psi	Liters per Day	Pressure bar
<b>E10FXA</b>	A	White	7.4	25	28.0	1.7
<b>E10FXB</b>	B	White	14.0	25	52.9	1.7
<b>E20FXB</b>	B	White	24.8	25	93.7	1.7
<b>E20FXC</b>	C	White	38.8	25	146.7	1.7
<b>E10FXH</b>	H	Black	14.0	80	52.9	5.5
<b>E20FXH</b>	H	Black	23.5	80	88.8	5.5


Approximate Maximum Outputs @ 50/60Hz

### Econ VX Flow Rate Output Charts

Item Number Prefix	Pump Tube	Roller Assembly	Gallons per Day	Pressure psi	Liters per Day	Pressure bar
<b>E10VXA</b>	A	White	0.8 to 7.4	25	3.0 to 28.0	1.7
<b>E10VXB</b>	B	White	1.2 to 14.0	25	4.5 to 52.9	1.7
<b>E20VXB</b>	B	White	1.6 to 24.8	25	6.0 to 93.7	1.7
<b>E20VXC</b>	C	White	4.4 to 38.8	25	16.6 to 146.7	1.7
<b>E10VXH</b>	H	Black	1.7 to 14.0	80	6.4 to 52.9	5.5
<b>E20VXH</b>	H	Black	2.7 to 23.5	80	10.2 to 88.8	5.5

Approximate Maximum Outputs @ 50/60Hz

### Build An Item Number for the Pump or Tank System

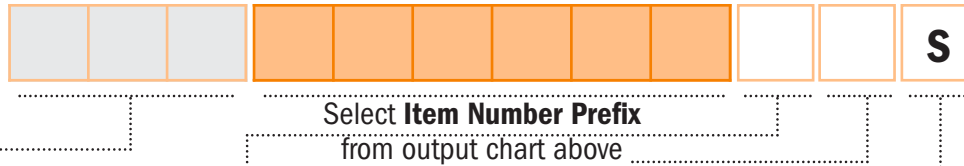

Omit if not ordering a Tank System

#### Tank

- S7G** 7.5-Gallon UV Gray
- S7N** 7.5-Gallon White
- S1G** 15-Gallon UV Gray
- S1N** 15-Gallon White
- S3G** 30-Gallon UV Gray
- S3N** 30-Gallon White

NOTE: Tanks also sold separately.

#### Voltage & Hertz/Cord

- A** 120V 60Hz
- B** 230V 60Hz
- 5** 24VDC
- C** 230V 50Hz  
*International*

#### Suction & Discharge Tubing

- 1** 1/4" White
- 2** 1/4" UV Black
- 5** 6 mm White *Europe*

#### Tube Material

**S** Santoprene®  
NOTE: Refer to chemical resistance guide for chemical compatibility.